# 18oz. Coated PVC

## Technical Specifications

| Properties | Test Method | Results |
|---|---|---|
| Fabric | -- | PVC |
| Weight (OZ) | FS - 5041 | 19 sq/yd |
| Grab (LBS) | FS - 5100 | W-430, F-440 |
| Cur Strip 2" (LBS) | FS - 5102 | W-450, F-470 |
| Tongue Tear (LBS) | FS - 5134 | W-100, F-80 |
| Adhesion | FS - 5970 | 20/18 lbs/2" |
| Abrasion-Cycles | ASTM 3884-80 | 4600 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| Impermeable : Impervious to Water | | |

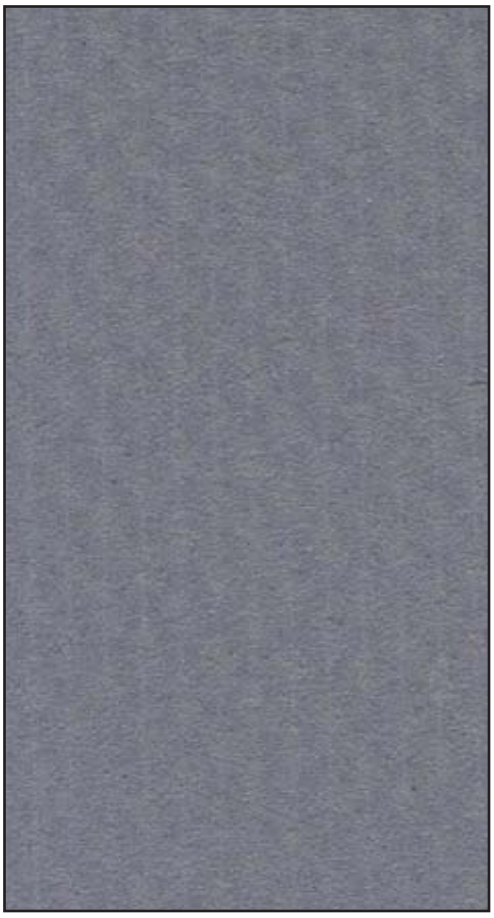


800-659-5111

Indian Valley Industries, Inc.

Quality and Service Since 1940