


ENVIRO 130 FR

Technical Specifications

Properties	Test Method	Results
Fabric	--	Woven Polypropylene
Weight (OZ)	ASTM D- 3776	13.4 sq/yd
Trap Tear (LBS)	ASTM D- 5136	W-62, F-58
Grab (LBS)	ASTM D- 5100	W-246, F-252
Adhesion-Diag.	ASTM D- 751-79	Won't Strip
Abrasion-Cycles	ASTM D- 5306	250
Hydrostatic (PSI)	ASTM D- 5512	350
Cold Crack (F°)	ASTM D- 5874	-10
Mildew- Tensile Loss	ASTM D- 5762	LT 10%
Intermit./Contin.F°		180, 160
UV Resistant	ASTM-G-77-QUV	500 hrs.
Flame Resist.	ASTM - 5903	Passed
Flame Resist.	NFPA - 701	AF- 1sec. Char 4
Impermeable : Impervious to Water		

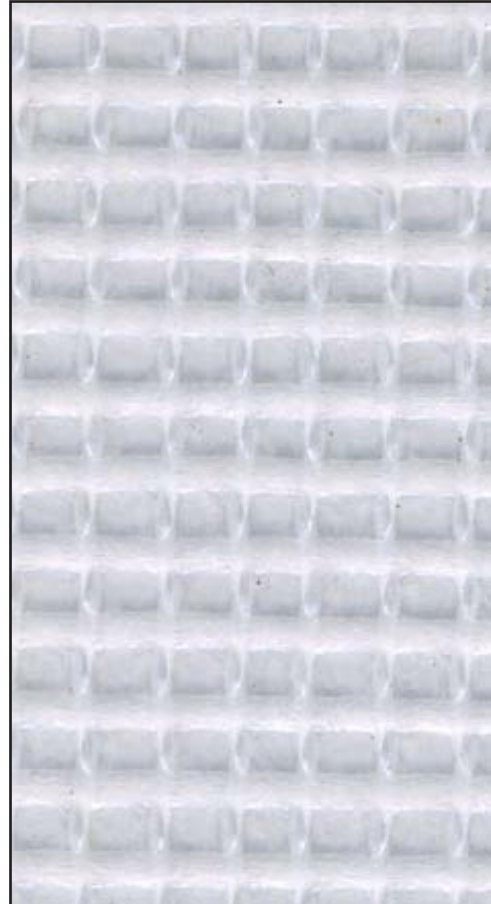

800-659-5111



Indian Valley Industries, Inc.

Quality and Service Since 1940